

Day & Night Dome Camera

MODEL



2-D-13



**600TVL High Res. c/w
Super Mega Pixel Lens**

Day & Night Indoor color dome camera with high sensitivity and DSP signal processing.

- ▶ Mounts to wall or ceiling
- ▶ COLOR camera PCB Module with SONY 1/3" Super HAD II CCD sensor
- ▶ Digital Signal Processor (DSP) IC for image control
- ▶ Pixel number: NTSC=270,000 / PAL=320,000
- ▶ High resolution and low dark current
- ▶ High sensitivity, Low smear, Excellent anti-blooming and High S/N ratio
- ▶ Auto Electronic Shutter (AES)
- ▶ Auto White Balance (AWB)
- ▶ Back Light Compensation (BLC), Flicker Less (FL)
- ▶ Built-in anti-aliasing.

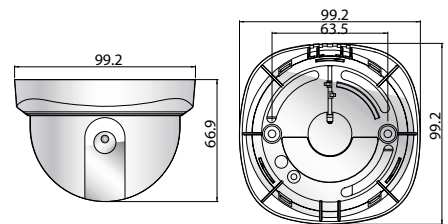

Imaging Device	SONY 1/3" Super HAD II CCD Sensor with SONY DSP
Effective Picture Elements	NTSC : 510 x 492, PAL : 500 x 582 (H x V)
Horizontal Resolution	600 TV lines
Min. Illumination	0.001 LUX@F1.0
S/N Ratio	More than 48dB
Auto Electronic Shutter	NTSC : 1/60s ~ 1/100,000s, PAL 1/50s ~ 1/110,000s
Auto Gain Control	Automatic
Auto White Balance	Color Temperature : 2500K ~ 9500K
Gamma	0.45
Sync	Internal, Negative sync.
Video Output	1Vp-p Composite Video / 75 ohms.
Power Supply	12V DC +/- 1V
Power Consumption	110mA
Lens	Board lens f4.0mm / F1.0 (optional : f 2.5/4.3/6.0/8.0/12mm)
Operating Temperature	-10°C to 50°C (14°F to 122°F)

© 2008 XCam. Due to continuous product development we reserve the right to change models and specifications without prior notice.

Available from:



HIGHEST QUALITY – BEST PERFORMANCE